
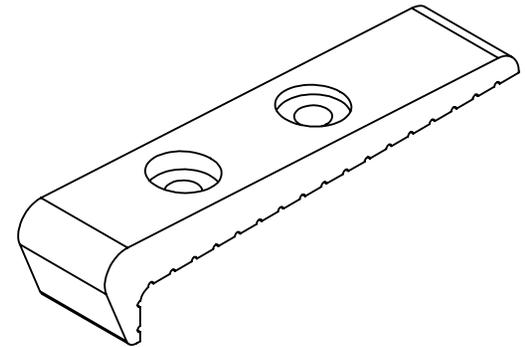
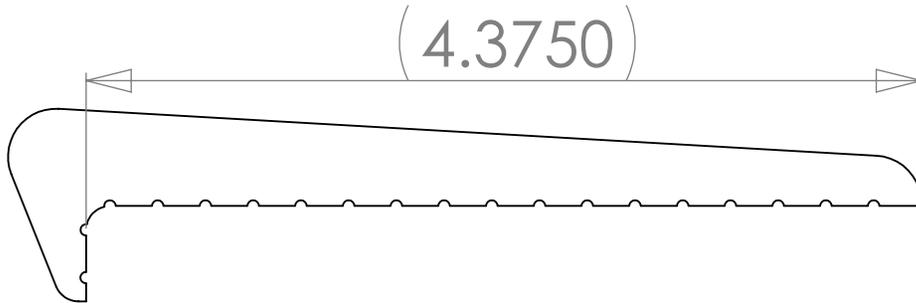


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INTELLECT. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INTELLECT IS PROHIBITED.

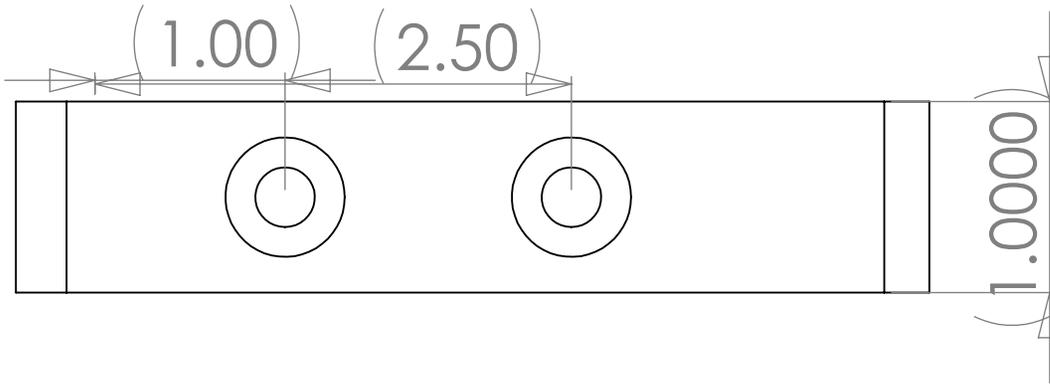

6061 T6 Aluminum. Debur. Type II Clear anodize or Hard Anodize.
Bolt to plank with carriage bolts, washers and nuts.

Spacing: product to be spaced 18-24" from end of the wall and approx 36" +/- 6" on center (do not exceed 4' max).

****NOT FOR USE ON CONCRETE OR STONE SUBSTRATES****

Not intended for use on steps, stairs, sidewalk curb or any other pedestrian trafficked surface

INTELLECT
SAN DIEGO, CALIFORNIA, U.S.A.

FR0.12BC
Bench Clip for wood,
fiberglass, and bleacher
planks only

SIZE A	DWG. NO.	REV.
SCALE	CAD FILE:	SHEET OF

2 1