
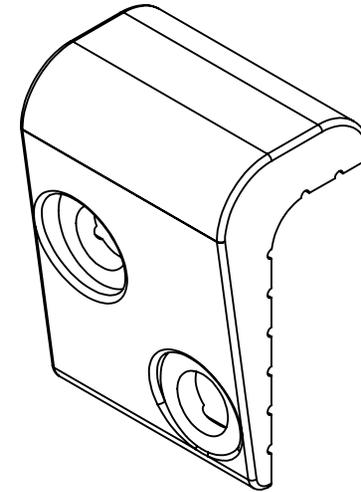


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INTELLECT. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INTELLECT IS PROHIBITED.

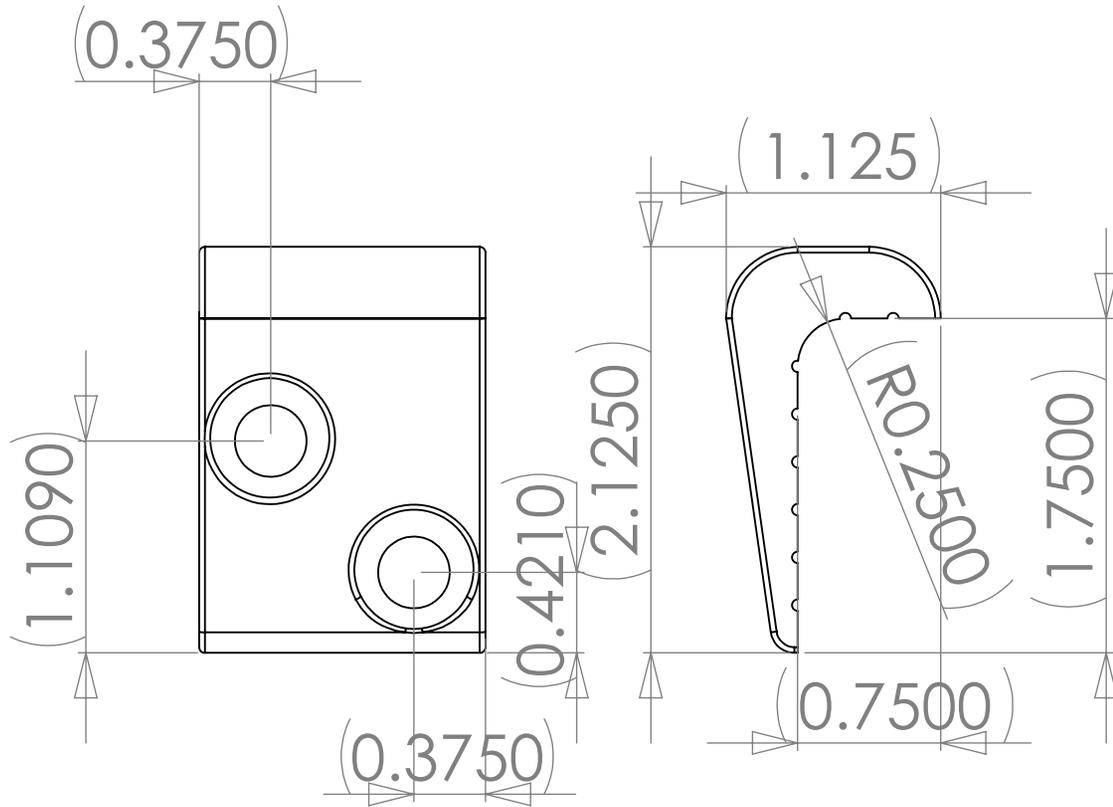

6061 T6 Aluminum. Debur. Type II Clear anodize or Hard Anodize.
Two offset thru holes for carriage bolt assembly

Spacing: product to be spaced 18-24" from end of the wall and approx 36" +/- 6" on center (do not exceed 4' max).

****DO NOT USE ON CONCRETE OR STONE SUBSTRATES****

Not intended for use on steps, stairs, sidewalk curb or any other pedestrian trafficked surface

INTELLECT
SAN DIEGO, CALIFORNIA, U.S.A.

FR025PC
for plastic dipped
steel angle

SIZE A	DWG. NO.	REV.
SCALE	CAD FILE:	SHEET OF
	2	1