

D

(7.5000)

(1.1250)

D


C

(0.5000)

(2.1250)

(4.8750)

B

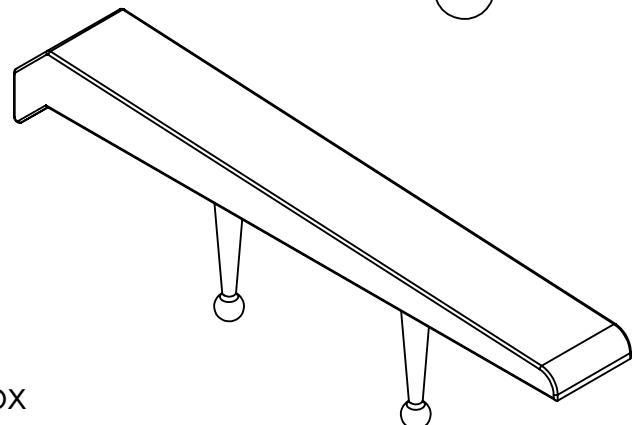

316 Stainless Steel surface mount. Drill and epoxy mounting pins into predrilled holes.

Spacing: product to be spaced 18-24" from end of the wall and approx 36" +/- 6" on center (do not exceed 4' max). Do not apply product at grout joint. For applications with grout joints, layout should be symmetric but part locations must be safe drilling distance from joint (min 4")

Not intended for use on steps, stairs, sidewalk curb or any other pedestrian trafficked surface.

INTELLICEPT
SAN DIEGO, CALIFORNIA, U.S.A.

G135SS
316 Stainless
Steel

SIZE	DWG. NO.	REV.
A		
SCALE	CAD FILE:	OF

8

7

6

5

4

3

2

1