


6061 T6 Aluminum. Deburr. Type II Clear anodize or Hard Anodize.
Set with two 3/8" x 1-1/2" studs and epoxy.

Spacing: product to be spaced 18-24" from end of the wall and approx 36" +/- 6" on center (do not exceed 4' max). Do not apply product at grout joint. For applications with grout joints, layout should be symmetric but part locations must be safe drilling distance from joint (min 4")

**Not intended for use on steps, stairs, sidewalk
curb or any other pedestrian trafficked surface.**

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
INTELICEPT. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
INTELICEPT IS PROHIBITED.

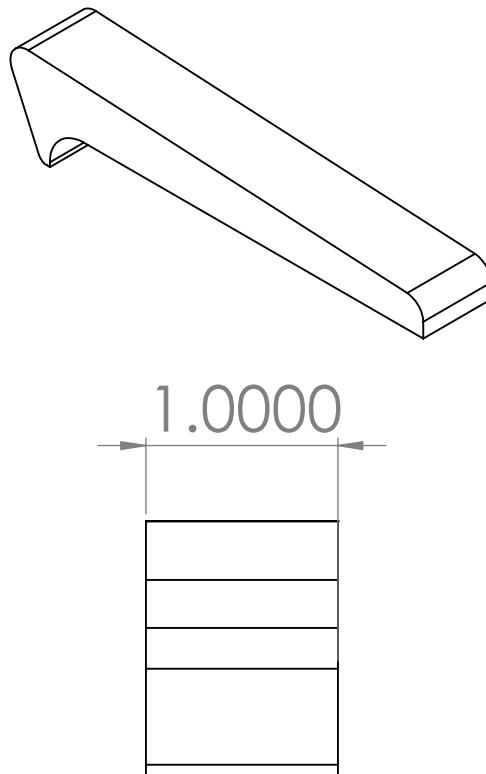

Intelicept- Makers of
SKATESTOPPERS

TITLE:

Gorilla R0.5

SIZE	DWG. NO.	REV
A	GOR05CUTSHEET122025	
		SHEET 1 OF 1